



# IO CARD(SECO-IO2000)

SECO 2000Series

## II. Specifications

Model: SECO IO2000  
Isolated Input 8 Channels  
Relay Output 8 Channels  
Signal LED

## III. CONNECTION

### Digital Input Port

#### Connector

- D-SUB,9pins, Male, Right Angle

Pin No.	Description
1	COM(24V)
2	Digital Input #1
3	Digital Input #2
4	Digital Input #3
5	Digital Input #4
6	Digital Input #5
7	Digital Input #6
8	Digital Input #7
9	Digital Input #8

### Digital Output Port

#### Connector


- D-SUB, 9pins, Female, Right Angle

Pin No.	Description
1	COM(0V)
2	Digital Output #1
3	Digital Output #2
4	Digital Output #3
5	Digital Output #4
6	Digital Output #5
7	Digital Output #6
8	Digital Output #7
9	Digital Output #8

# IO CARD(SECO-IO2000)

SECO 2000Series

## IV. UNIT DIMENSION

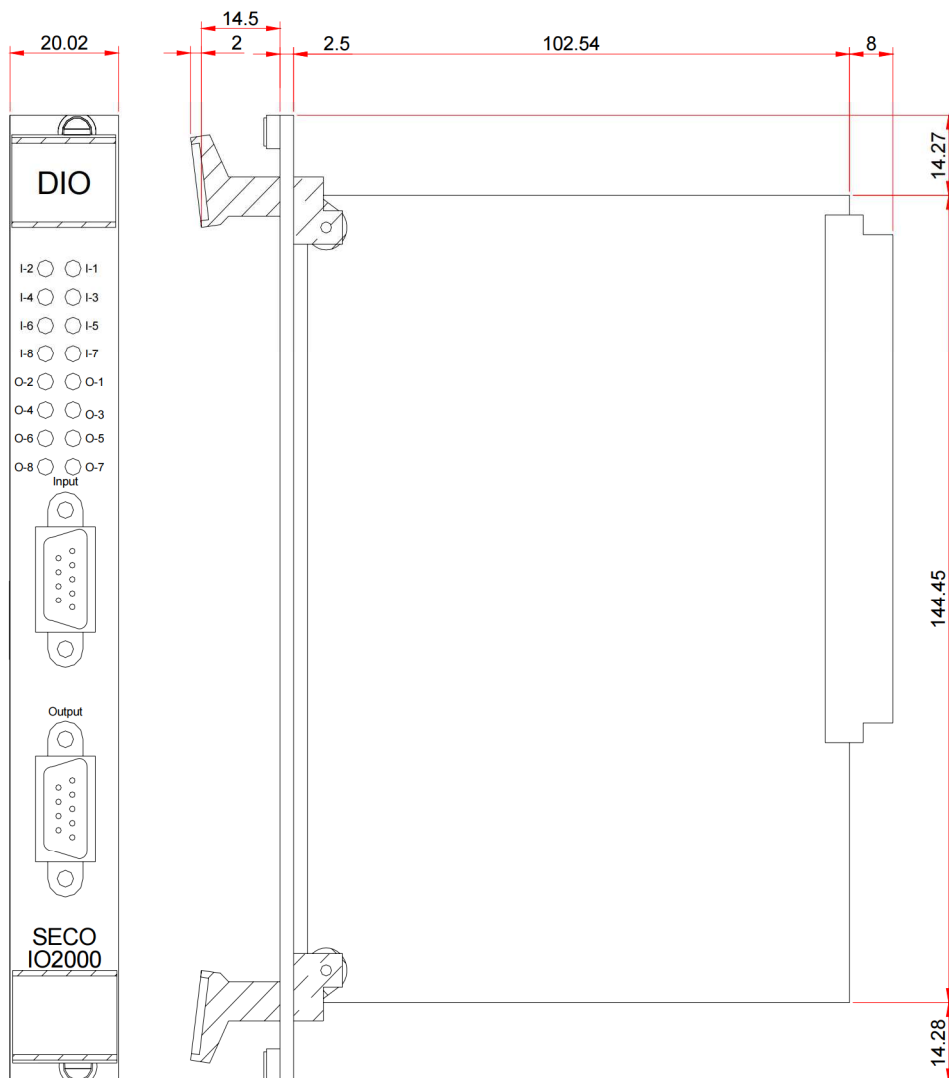

# IO CARD(SECO-IO2000)

SECO 2000Series

## V. Notes

SGHITEC	Address: 19, Namsan 4-gil, Gwangyang-si, Jeollanam-do, 57722, Korea
	Tel : (061)791-4475 Fax: (061)792-4024
URL	<a href="http://www.sgtec.org">http://www.sgtec.org</a>
E-mail	<a href="mailto:sgtec@sgtec.org">sgtec@sgtec.org</a>